

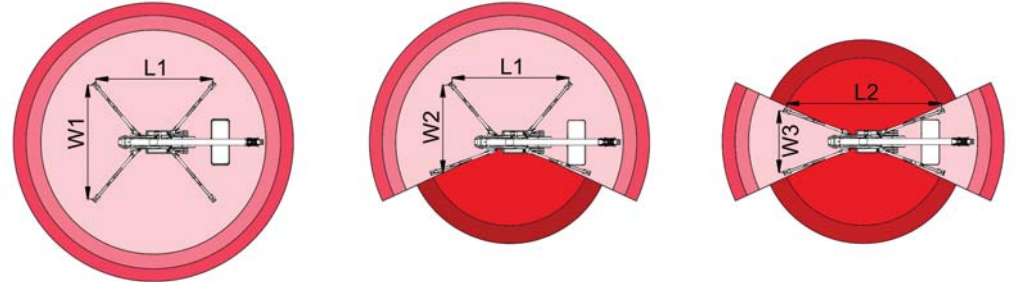


32 m ↑
14,5 m →
330 Kg 🧑🧑🧑

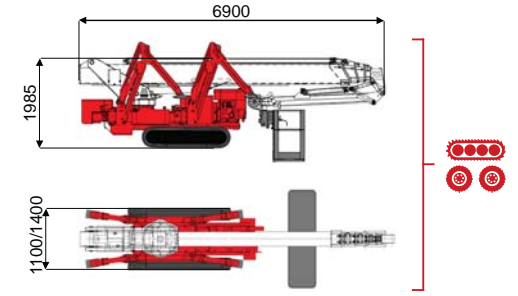

12000 mm	13500 mm	14500 mm	7400 mm	10500 mm	L1	L2	W1	W2	W3
330 kg	250 kg	120 kg	330 kg	120/230 kg	5113 mm	6445 mm	4743 mm	3781 mm	2823 mm

BI-ENERGY
Diesel+AC

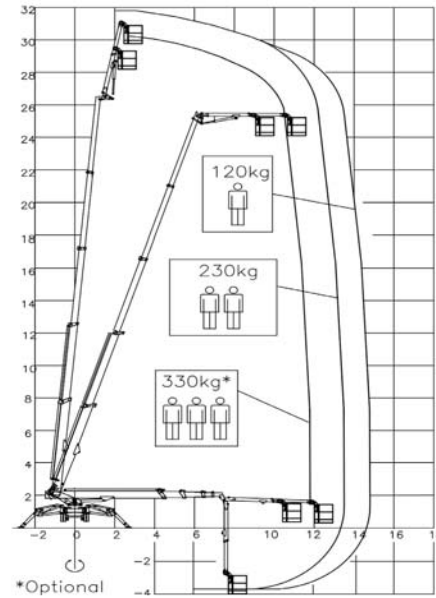

XTJ 32/C-R 32 m 14,5 m 330 kg 175° 540° 180x70 cm 90°+80° 2,8-4,7 m 15% 40% 3,0 km/h 5940 kg 35 kN 2,62 kN/m² 4,53 kN/m² 1100/1400 mm 6900 mm 1985 mm

	Battery type	Battery charge	Add. Weight	Autonomy	Charging time	Electropump	
ECO	DC+AC	48V 320 A/h 5h	230V-48V 45A	450 kg	6-7 h endless	7h	48V 12 kW
ECO	DC+AC	48V 270 A/h 5h	230V-48V 45A	400 kg	6-7 h endless	7h	48V 9 kW
HYBRID	Diesel+DC	24V 240 A/h 5h	230V-24V 35A	200 kg	2-3 h endless	7h	24V 3 kW

Characteristics and technical data are informative only and subjected to change without notice.