


# JLG® Compact Telehandlers SPECIFICATIONS

	<b>2505</b>	<b>2906H</b>	<b>L2906H</b>	<b>3507H</b>
A. Maximum Lift Height	5.60 m	5.80 m	5.80 m	6.90 m
B. Length (Less Forks)	3.28 m	4.47 m	4.48 m	5.05 m
C. Width	1.80 m	2.11 m	2.11 m	2.33 m
D. Height	1.90 m	2.35 m	2.00 m	2.45 m
E. Wheelbase	2.29 m	2.70 m	2.76 m	2.98 m
F. Ground Clearance	270 mm	440 mm	340 mm	460 mm
Rated Capacity @ 2100RPM	284 nM	340 nM	340 nM	340 nM
Rated Capacity	2,500 kg	2,900 kg	2,900 kg	3,500 kg
Capacity @ Maximum Lift Height	2,000 kg	2,200 kg	2,200 kg	2,600 kg
Maximum Forward Reach	3.30 m	3.16 m	3.16 m	3.90 m
Capacity @ Maximum Reach	800 kg	1,000 kg	1,000 kg	1,350 kg
Approximate Operating Weight	5,010 kg	6,743 kg	6,743 kg	8,096 kg
Outside Turning Radius	3.20 m	3.70 m	3.70 m	3.89 m
Drive	4 x 4	4 x 4	4 x 4	4 x 4
Engine	Deutz TD 2.9 L4 Turbocharged	Deutz TCD 2012 - L04 V02	Deutz TCD 2012 - L04 V02	Deutz TCD 2012 - L04 V02
Engine Gross Power	55 kW / 75 Hp	74.9 kW / 100 Hp	74.9 kW / 100 Hp	74.9 kW / 100 hp
Transmission	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Steering	Two wheel / Four Wheel / Crab Steer with Rear Wheel assisted alignment			
Tires	12 x 17.5	405/70-20	405/70-20	405/70-24
Maximum Travel Speed	24 km/h	32 km/h	32 km/h	32 km/h
Frame Tilt Left/Right	n/a	n/a	n/a	n/a

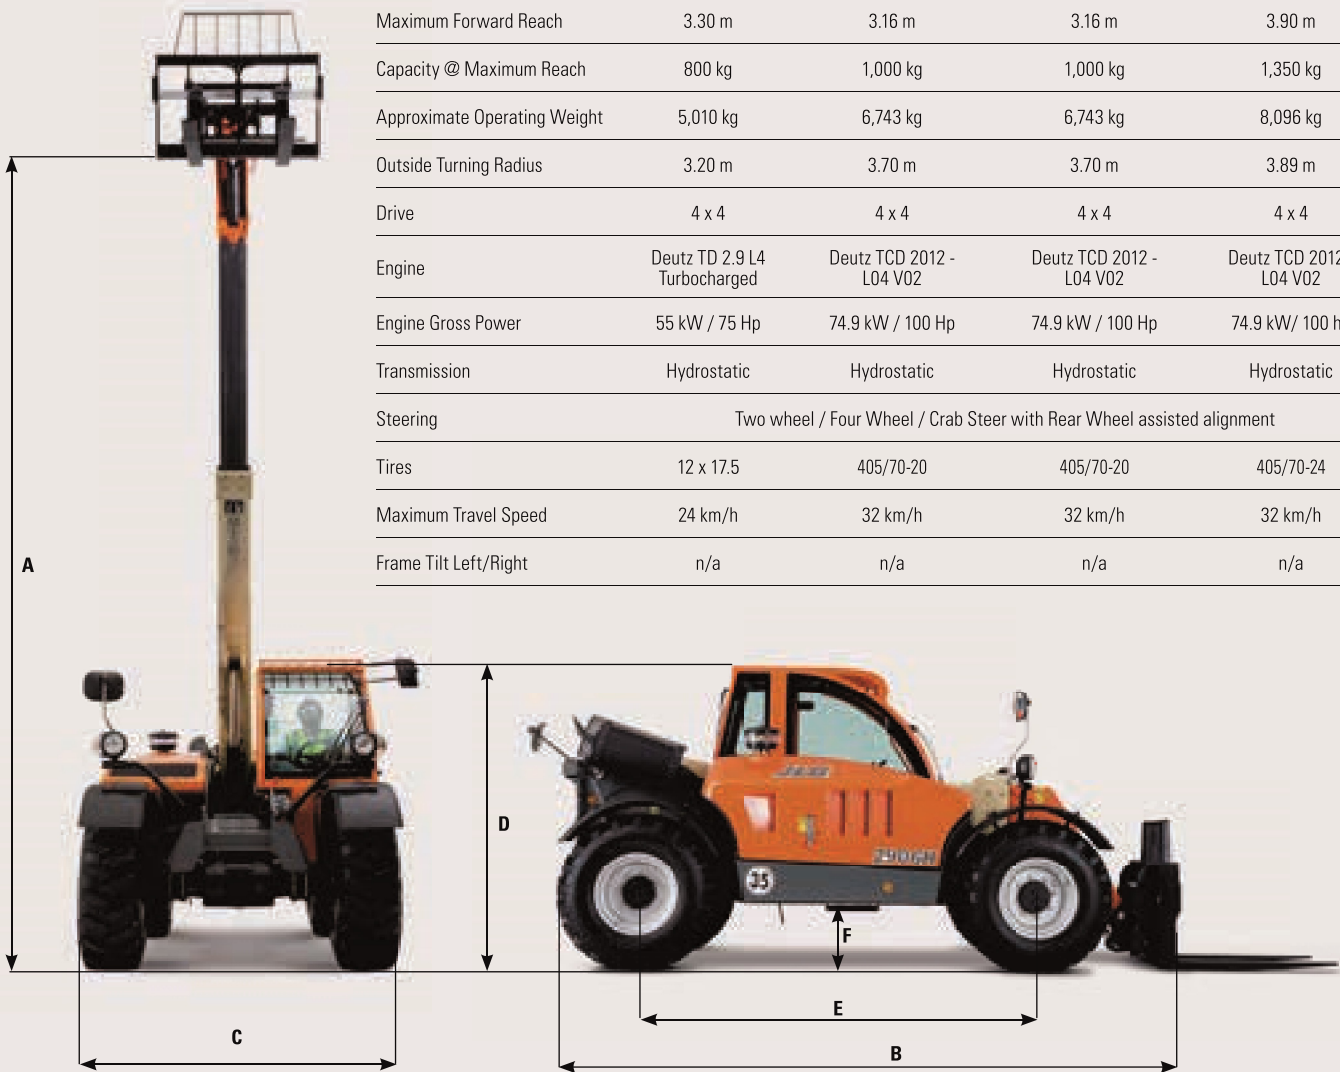

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.